MOBILE GEAR

VEC009MG

VECTOR
The Freedom of POWER

CAR POWER DC ADAPTER

OWNER'S MANUAL AND WARRANTY INFORMATION

THIS MANUAL CONTAINS IMPORTANT INFORMATION REGARDING SAFETY, OPERATION, MAINTENANCE AND STORAGE OF THIS PRODUCT. READ CAREFULLY BEFORE USE, AND RETAIN FOR FUTURE REFERENCE.

4140 S.W. 28th Way, Ft. Lauderdale, FL 33312

Tel: (954) 584-4446 Fax: (954) 584-5556 Toll Free: (866) 584-5504

WARNING: You must first determine the correct polarity of your device. Polarity information may be found next to the device DC jack, in the device user's manual or on the device's information plate.

WARNING: If your device does not work IMMEDIATELY, unplug the car power adapter and recheck the instructions carefully for voltage and polarity settings.

CAUTION: Never attempt to power a device for which the voltage or polarity is unknown. Improper voltage or polarity settings may result in severe damage to the device or car power adapter.

DO NOT use with any device that requires more than 2000mA of current.

OPERATION

1. Using the supplied key (1), set the voltage selector switch (3) to the proper setting (4) for your device. Refer to your device's user's manual for the correct voltage requirement or determine the voltage by multiplying the number of batteries by 1.5.

   Example: 4 batteries x 1.5 = 6 volts. Voltage setting may also be found next to device DC jack or on device information plate.

2. Select the adapter tip (6) that best fits the device.

   WARNING: You must first determine the correct polarity of your device. Polarity information may be found next to device's DC jack, in the user's manual or on the device information plate.

3. Select the adapter tip that best fits the device.
4. Align negative/positive adapter tip with the car power adapter receptacle (7).

   IMPORTANT: Each adapter plug tip (6) has a positive symbol (+) on one side and a negative symbol (-) on the other side.



5. The car power adapter receptacle (7) has the word "TIP" on one side only.

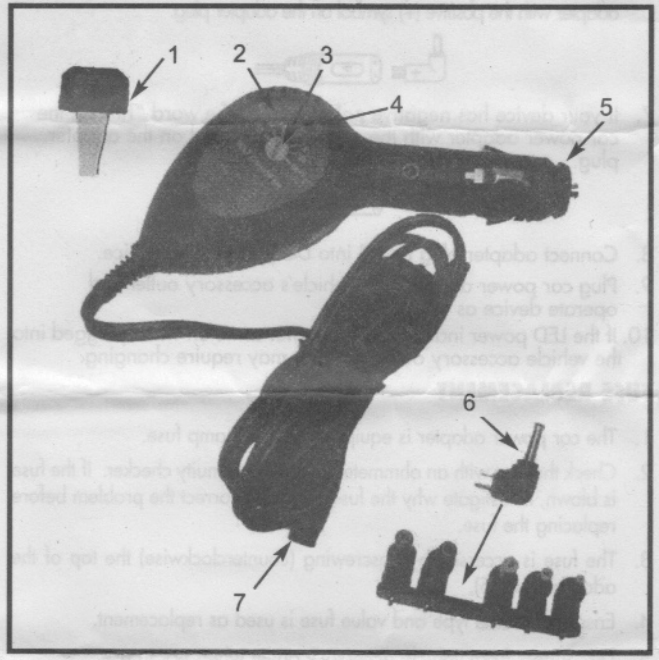

6. If your device has **positive** polarity, align the word "TIP" on the car power adapter with the positive (+) symbol on the adapter plug.



7. If your device has **negative** polarity, align the word "TIP" on the car power adapter with the negative (-) symbol on the adapter plug.



8. Connect adapter plug tip (6) into DC jack of your device.
9. Plug car power adapter into vehicle's accessory outlet and operate device as usual.
10. If the LED power indicator (4) does not come on when plugged into the vehicle accessory outlet, the fuse may require changing.

FUSE REPLACEMENT

1. The car power adapter is equipped with a 3-amp fuse.
2. Check the fuse with an ohmmeter or other continuity checker. If the fuse is blown, investigate why the fuse blew and correct the problem before replacing the fuse.
3. The fuse is accessed by unscrewing (counterclockwise) the top of the adapter plug (5).
4. Ensure the same type and value fuse is used as replacement.
5. Disconnect from vehicle accessory outlet when not in use.

1 YEAR LIMITED WARRANTY PROGRAM

This limited warranty program is the only one that applies to this product, and it sets forth all the responsibilities of Vector Manufacturing, Ltd., regarding this product. There is no other warranty, other than those described herein.

This Vector Manufacturing, Ltd. product is warranted, to the original purchaser only, to be free of defects in materials and workmanship for two years from the date of purchase without additional charge. The warranty does not extend to subsequent purchasers or users. Vector Manufacturing, Ltd. will not be responsible for any amount of damage in excess of the retail purchase price of the product under any circumstances. Incidental and consequential damages are specifically excluded from coverage under this warranty.

This product is not intended for commercial use. This warranty does not apply to accessories or damage to units from misuse or incorrect installation. Misuse includes wiring or connecting to improper polarity power sources.

RETURN/REPAIR POLICY: Defective products, other than accessories, may be returned postage prepaid to Vector Manufacturing. Any defective product, other than accessories, that is returned to Vector Manufacturing within
30 days of the date of purchase will be replaced free of charge. If such a product is returned more than 30 days but less than two years from the purchase date, Vector Manufacturing will repair the unit or, at its option, replace it free of charge.

If the unit is repaired, new or reconditioned replacement parts may be used, at Vector Manufacturing's option.
A unit may be replaced with a new or reconditioned unit of the same or comparable design. The repaired or replaced unit will then be warranted under the terms of the remainder of the warranty period. The customer is responsible for the shipping charges on all returned items after 30 days. During the warranty period, Vector Manufacturing, Ltd. will be responsible for the return shipping charges.

LIMITATIONS: This warranty does not cover accessories, bulbs, fuses and batteries, defects resulting from normal wear and tear (including chips, scratches, abrasions, discoloration or fading due to usage or exposure to sunlight),
accidents, damage during shipping to our service facility, alterations, unauthorized use or repair, neglect, misuse, abuse, failure to follow instructions for care and maintenance, fire, flood and Acts of God.

If your problem is not covered by this warranty, call our Technical Support Department at (954) 584-4446 or toll free at (866) 584-5504 for general repair information and charges if applicable. You may also contact us through our website at www.vectormfg.com.

STATE LAW RIGHTS: This warranty gives you specific legal rights. Some states do not allow limitations on how long
an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the exclusions or limitations stated herein may not apply. This warranty gives the purchaser

specific legal rights; other rights, which vary from state to state, may apply.

TO REQUEST WARRANTY SERVICE FOR THIS PRODUCT: Contact Vector Manufacturing Technical Support by telephone,
fax or mail. We suggest that you keep the original packaging in case you need to ship the unit. When returning a product, include your name, address, phone number, dated sales receipt (or copy) and a description of the reason for return and product serial number. After repairing or replacing the unit, we will make every effort to return it to you within four weeks.

WARRANTY ACTIVATION: Please complete Warranty Activation Card and mail to Vector Manufacturing. Enter "VEC009MG" as Model and "Car Power DC adapter" as Product Type. All Vector Manufacturing, Ltd. products must be registered within 10 days of purchase to activate this warranty. Mail the
completed registration form, along with a copy of the original sales receipt to:

ATTN.: CUSTOMER SERVICE / VECTOR MANUFACTURING, Ltd.
4140 SW 28th Way, Ft. Lauderdale, FL 33312
PH: 954-584-4446 • TOLL FREE: 866-584-5504 • Fax: 954-584-5556.
You may also contact us at our web site www.vectormfg.com.

WARRANTY IS NON-TRANSFERABLE AND NON-REFUNDABLE.

RD010605